




Zac Bollard

External lighting



Architectural designer LED bollard in multiple sizes. Suitable for pathways, gardens, driveways or landscape areas.

Construction: Extruded aluminium with. Internal LED Driver. IP65.
50mm Diameter Version - IK06
80mm Diameter Version - IK07

Lens: Clear Glass Lens

Installation: Flanged, with Anchor Bolts.

Finish: Light Grey as standard. Anthracite Grey on request.

LED: 6W to 13W LED. 4000K as standard, 3000K or 2700K on request.

Driver: Internal, 220-240V AC 50/60 Hz.


Options: Different heights, different diameters -50mm or 80mm, different finishes available.

Manufactured: EU.

Product Compliance: EN 60598, CE.

Veelite

DIMENSIONS

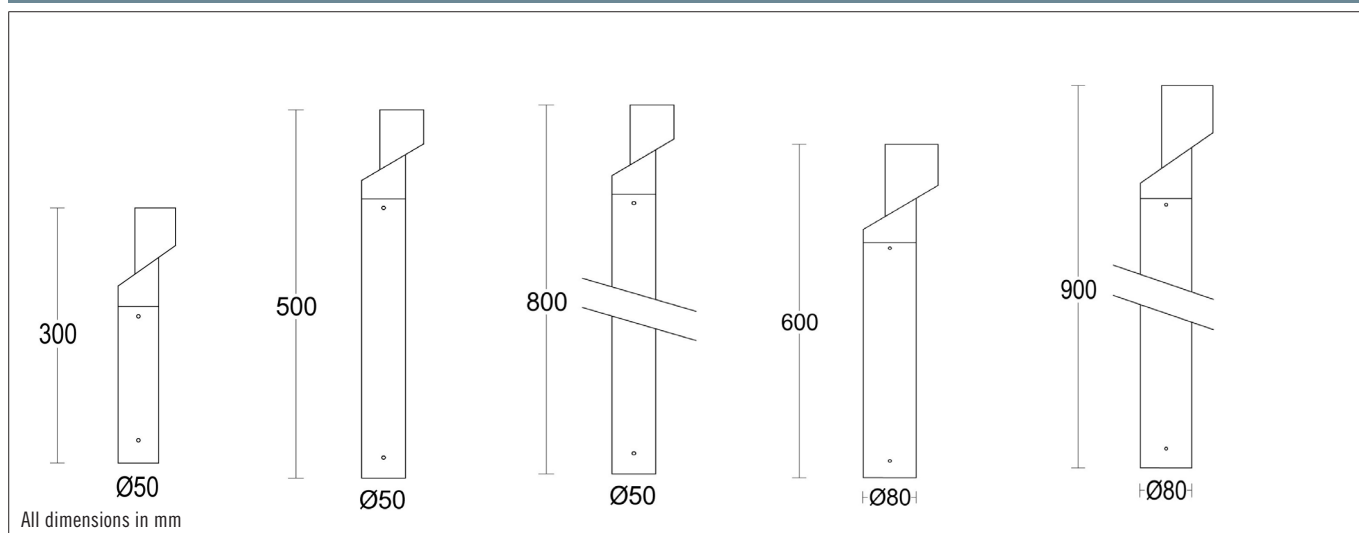

ORDERING CODE

Wattage	Type	Code	Diameter	Height	Details	+J Bolts	Lumens*
6W	LED	G1250.AHXA400	50mm	300mm	Zac Bollard 4000K, Flanged	GAC238	877 lm
6W	LED	G1251.AHXA400	50mm	500mm	Zac Bollard 4000K, Flanged	GAC238	877 lm
6W	LED	G1252.AHXA400	50mm	800mm	Zac Bollard 4000K, Flanged	GAC238	877 lm
6W	LED	G1253.AHXA400	80mm	600mm	Zac Bollard 4000K, Flanged	GAC248	877 lm
6W	LED	G1254.AHXA400	80mm	900mm	Zac Bollard 4000K, Flanged	GAC248	877 lm
13W	LED	G1253.BRXA400	80mm	600mm	Zac Bollard 4000K, Flanged	GAC248	1641 lm
13W	LED	G1254.BRXA400	80 mm	900mm	Zac Bollard 4000K, Flanged	GAC248	1641 lm

OPTIONS

.05: Anthracite Grey Finish
.19: Light Grey Finish
27K: 2700K Warm White
3K: 3000K Warm White
DALI: DALI Dimming

* Source Lumens.

