



Iris Indirect

External lighting



Architectural LED post-top luminaire for residential or pedestrian areas, gardens, parks, etc.

Construction: Made of injected cast aluminium and polycarbonate. IP66, IK08.

Lens: Polycarbonate Lens.

Installation: Post-top on 60mm Diameter Spigot (75mm high).

Finish: Grey RAL 9006 as standard. Other colours on request.

LED: 40w to 60w 4000K,


Driver: 220-240V, 50/60Hz.

Mains Surge Protection: 20kA device included as standard.

Product Compliance: EN 60598, CE.



DIMENSIONS

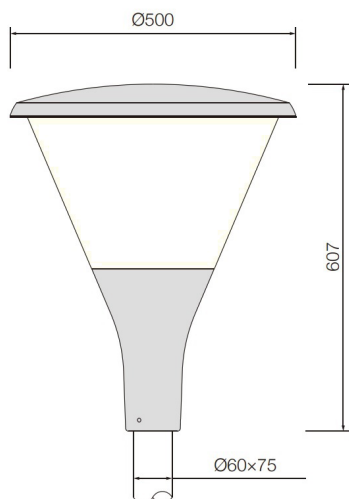

Weight: 8kgs EPA: 0.16m²

All Dimensions are in mm.

APPLICATION GUIDE


Iris Indirect

Height 4m

40w LED Symmetric 4000K

Contours in Lux

M. Factor = 0.90

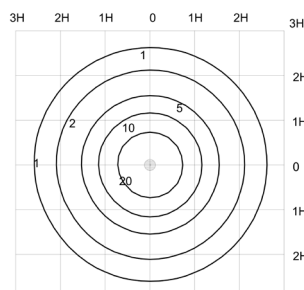

ORDERING CODE

Wattage	Type	Code	Details	Lumens*
40w	LED	5IRI14LGA	Post Top, Symmetric, 60mm Mastfitter, 4000K	3040
60w	LED	5IRI16LGA	Post Top, Symmetric, 60mm Mastfitter, 4000K	4400

* Luminaire lumen output.

OPTIONS

RAL: Pls specify

DALI: Dali Dimming

Further info on request · email: info@veelite.com · www.veelite.com

Specifications may change without prior notification. Ref: 697

Veelite